
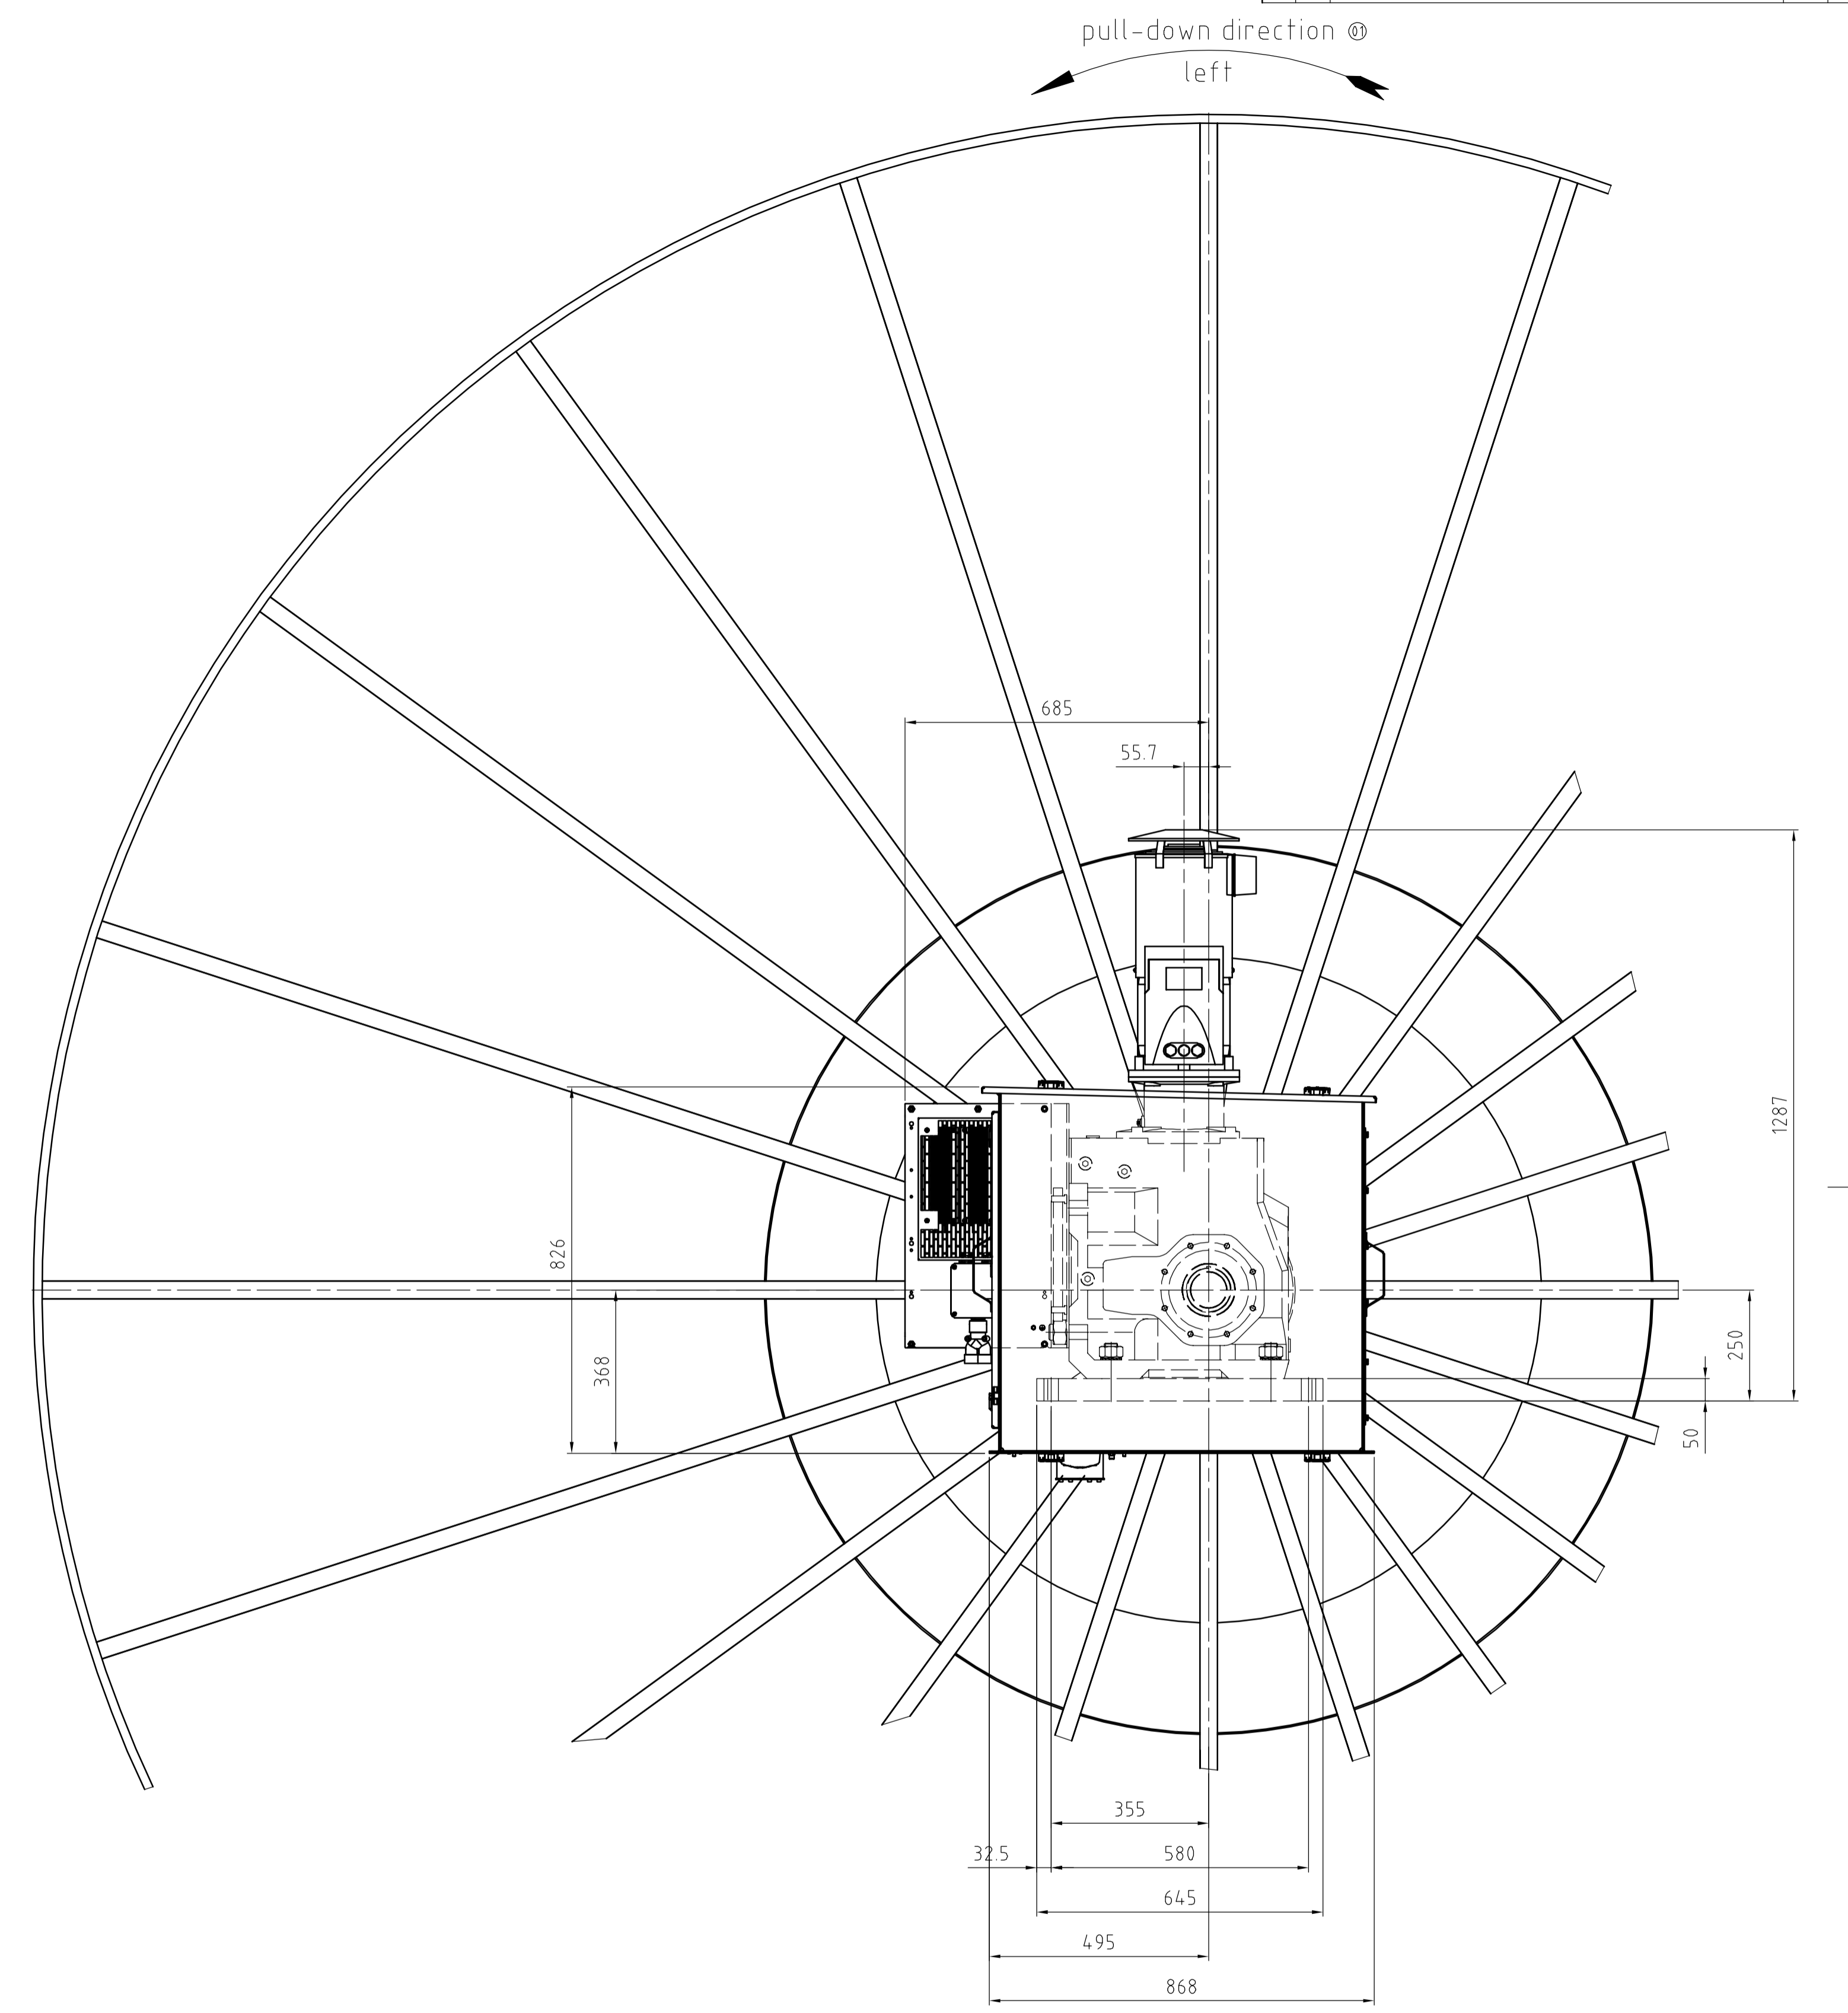


Index / Index		Änderungszustand		Datum / Name	
01	0	Leitungszug von rechts auf links geändert	BW 2019	Johnson	
02	L1	neu 6-PE 36A (inkl. Schirmpol) 500A / EzEntry alt: 6 Pole 36A, 500V / einzelne Verschraubungen	20.08.19	Lieber	

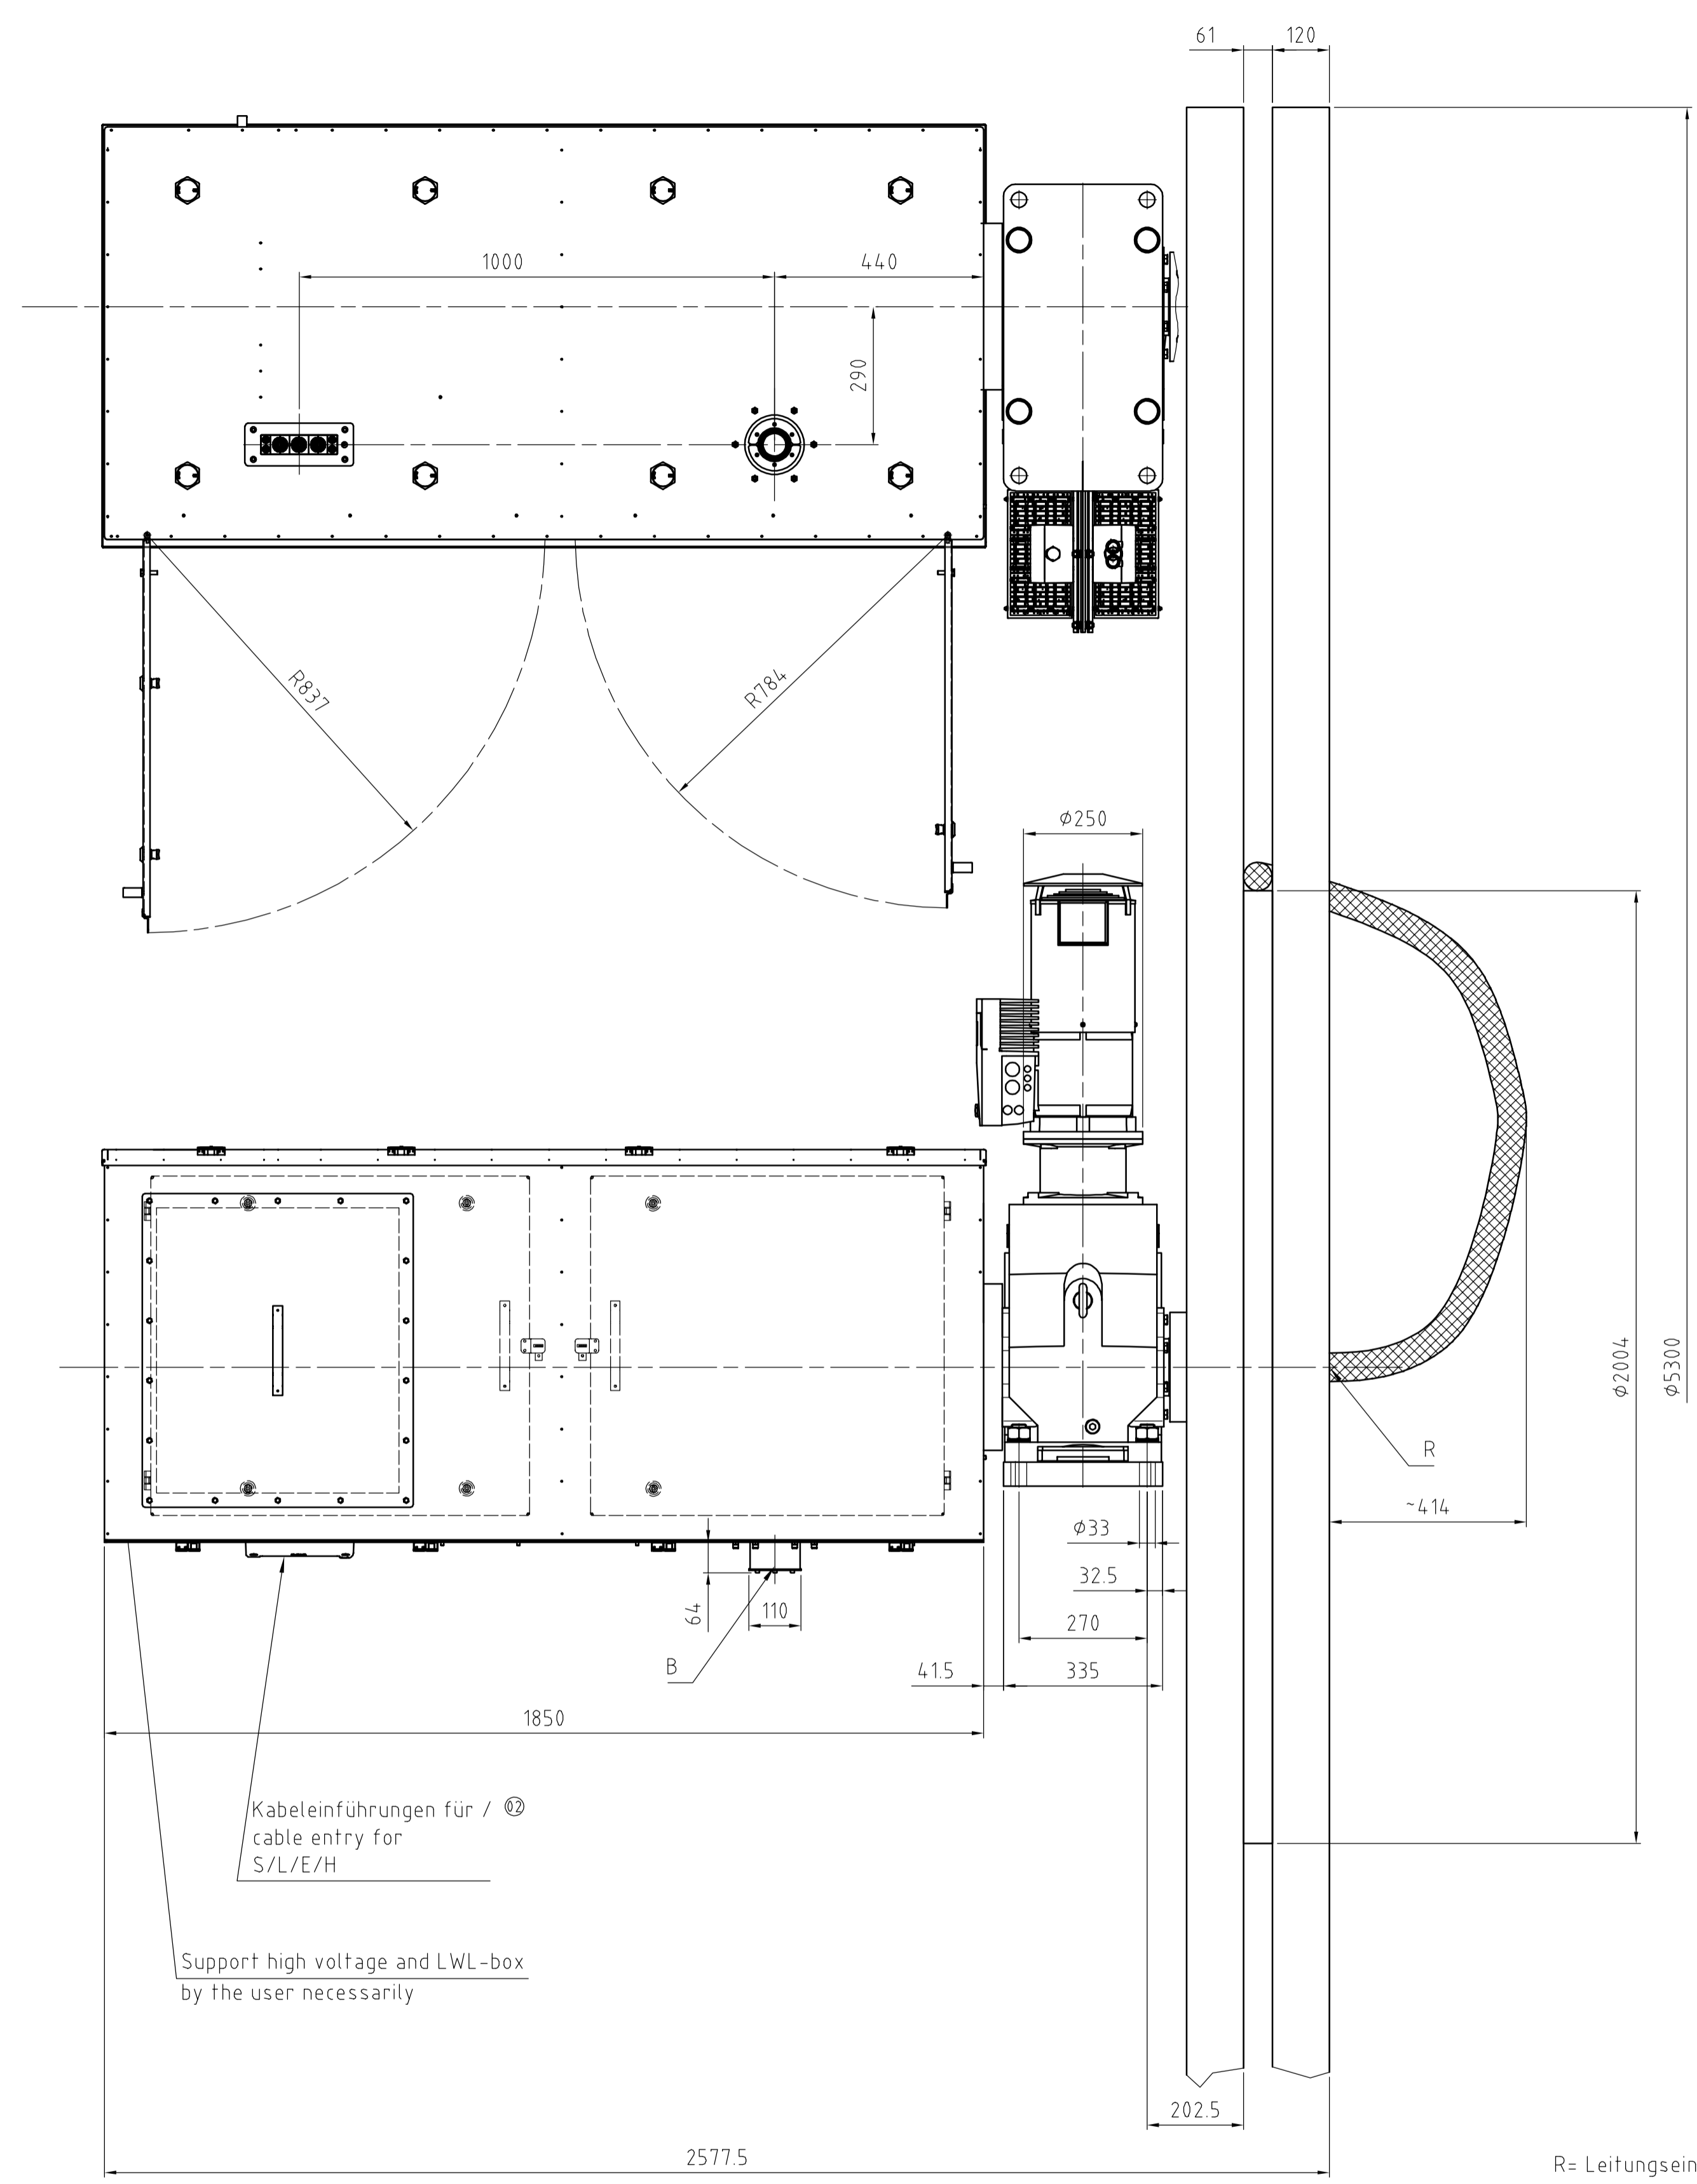

R= Leitungseinführung zu den Ringen  
 B= Leitungseinführung zu den Bürsten  
 R = cable entry to the rings  
 B = cable entry to the brushes

3 Pole + PE 240 A, 10 kV / 3 poles + earth 240A, 10 kV  
 + 6 Pole + PE 36 A (inkl. Schirmpol), 500 V / 6 poles + earth 36A (incl. screenpole), 500V  
 + 12 LWL / 12 fiber optics  
 + 2x Heizung 500W, 400V / 2x heating 500W, 400V  
 + Endschalter 4 Kontakte / limit switch 4 contacts

Kabeleinführung EzEntry für 4x ø3,5-16,5 und 3x ø10-32 /  
 cable entry EzEntry for 4x ø3,5-16,5 und 3x ø10-32  
 S = Steuerleitung / Control cable  
 L = LWL / FORJ  
 E = Enschalter / Limit switch  
 H = Heizung / Heater

Cond.	Revision	Date	Name	Edi	Date	Name	Description	Scale	Weight
	02	19.07.2019	Lippmann		19.07.2019	Lippmann	Motorized cable reel	1:10	~1920 kg
Attention! Proprietary software pursuant to ISO 16016							Material:		Model-no:
DIN ISO 2768-1 m 55 up to 16 +18 above 16 up to 30 +2 above 30 up to 100 +3 above 100 up to 400 +5 above 400 up to 1000 +8 above 1000 up to 2000 +12 above 2000 up to 6000 +20							Surface data - Rz in µm Signification untrated roughing smooth hone		Drawing no <b>N5000-0050</b> DIN A1
Hartmann & König <b>Stromzuführungs AG</b>							Replaced for:		Replaced through: